


Arco Series 1500

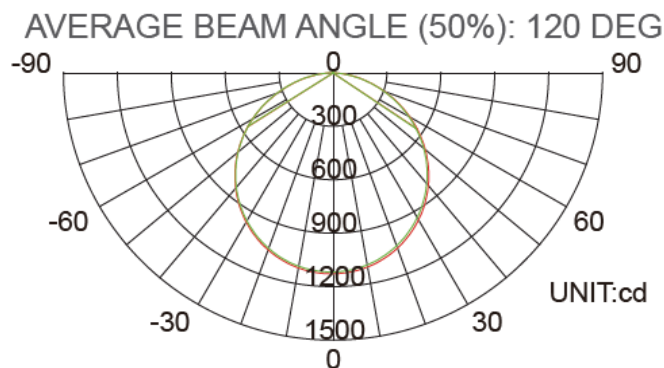

FEATURES

- Steel Case
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC200-240, 50Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -15°C to 50°C

OPTIONS

- 0-10V or DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Integral Sensor Available
- Available in 120 or 140 Lumens/W
- Emergency Componentry Available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-AFF01-25W	25W	120	1500mmL x 215mmW x 77mmH
AES-TP-AFF01-25W	25W	140	1500mmL x 215mmW x 77mmH
AES-TP-AFF01-50W	50W	120	1500mmL x 215mmW x 77mmH
AES-TP-AFF01-50W	50W	140	1500mmL x 215mmW x 77mmH
AES-TP-AFF01-60W	60W	120	1500mmL x 215mmW x 77mmH
AES-TP-AFF01-60W	60W	140	1500mmL x 215mmW x 77mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
6000K	6K	0-10V Dimmable	0-10V	DALI Dimmable	DALI
Emergency Comp	EMG	Sensor Control	SEN		



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136

P: (03) 8761 6734

E: sales@ausecotech.com.au

W: www.ausecotech.com.au



RoHS