


# Belgrave IP65 600x600

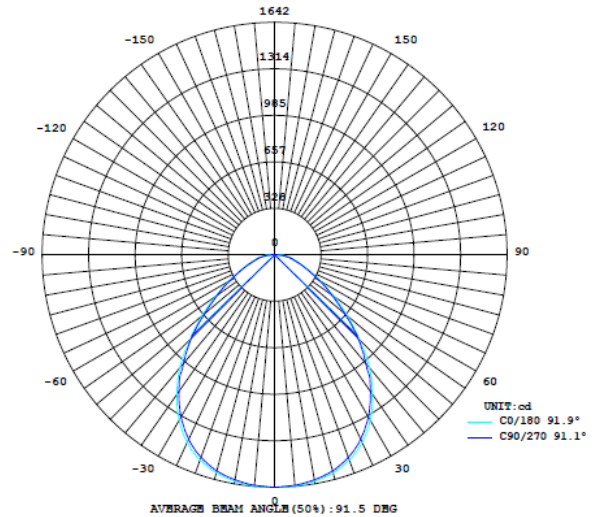

## FEATURES

- Aluminium Alloy Frame
- PMMA Frosted Diffuser
- LED Type: SMD 2835
- Driver: BOKE
- T-Bar Recessed
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C
- Voltage: AC85-265V

## OPTIONS

- 0-10V or DALI Dimmable
- Available in: 3000/4000/5000K CCT
- Available in custom colours upon request
- UGR<19 Prismatic Diffuser available
- Surface Mount or Plaster Recess frames available
- Suspension Kits available
- CCT Changeable option available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-PA-IP-B6060-18W	18W	100	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-18W	18W	110	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-25W	25W	100	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-25W	25W	110	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-30W	30W	100	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-30W	30W	110	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-40W	40W	100	595mmL x 595mmW x 11.5mmH
AES-PA-IP-B6060-40W	40W	110	595mmL x 595mmW x 11.5mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
0-10V Dimmable	0-10V	DALI Dimmable	DALI	CCT Changeable	CCT
UGR<19 Diffuser	UGR19	Custom Colour	CUS	Surface Mount Frame	SM
Plaster Recess Frame	PR	Suspension Kit	SUS		



**AES**  
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136  
 P: (03) 8761 6734  
 E: sales@ausecotech.com.au  
 W: www.ausecotech.com.au



**RoHS**