


Bullet 1500

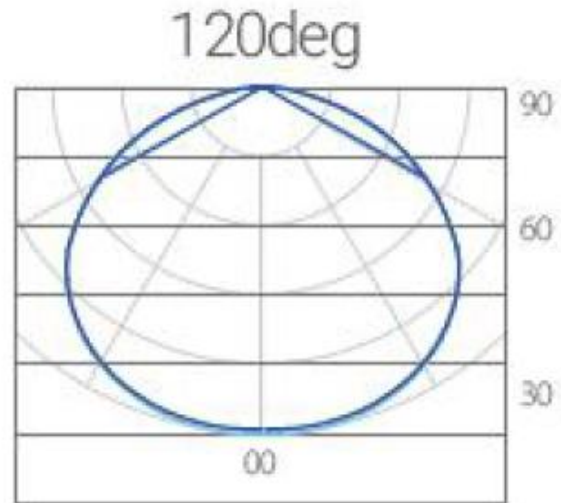

FEATURES

- Polycarbonate Case
- Polycarbonate Diffuser
- LED Type: Epistar SMD
- Voltage: AC220-240V, 50Hz
- **Single fitting - adjustable wattage**
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

OPTIONS

- DALI Dimmable
- Available in optional CCT: 3000/4000/5000K
- Integral Sensor Available
- Surface Mount or Suspended options
- Series Linkable
- Emergency Componentry Available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-LL-TL15-35/60W	35W-40W-50W-60W	130	1490mmL x 95mmW x 75mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
DALI Dimmable	DALI	Sensor Control	SEN	Emergency Comp	EMG
Linkable	LNK	Surface Mount	SM	Suspended	SUS



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
P: (03) 8761 6734
E: sales@ausecotech.com.au
W: www.ausecotech.com.au



RoHS