


Bullet 600

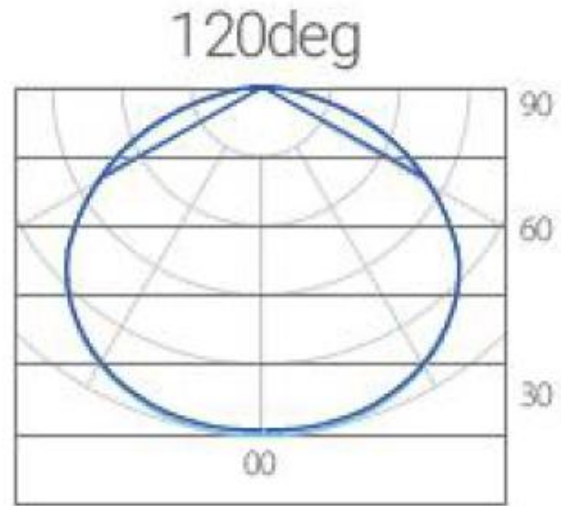

FEATURES

- Polycarbonate Case
- Polycarbonate Diffuser
- LED Type: Epistar SMD
- Voltage: AC220-240V, 50Hz
- **Single fitting - adjustable wattage**
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

OPTIONS

- DALI Dimmable
- Available in optional CCT: 3000/4000/5000K
- Surface Mount or Suspended options
- Series Linkable

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-LL-TL06-12/20W	12W-14W-17W-20W	130	590mmL x 95mmW x 75mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
Linkable	LNK	DALI Dimmable	DALI	Surface Mount	SM
Suspended	SUS				



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136

P: (03) 8761 6734

E: sales@ausecotech.com.au

W: www.ausecotech.com.au



RoHS