


# Lyle SM 55x40



**CEILING  
MOUNT**

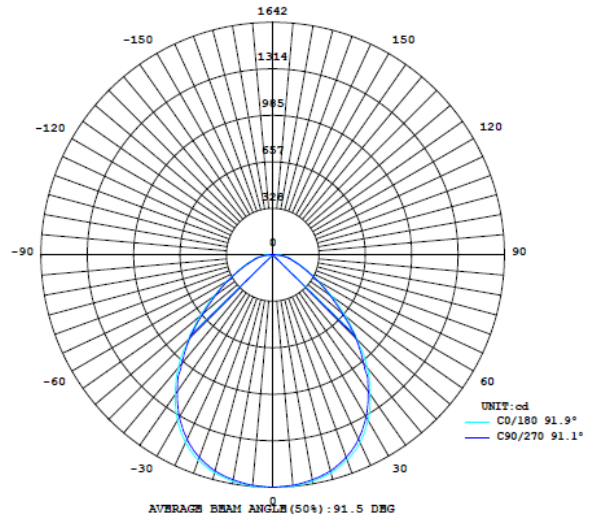

## FEATURES

- Aluminium Housing
- Polycarbonate Diffuser
- LED Type: Samsung
- Driver: Phillips
- Voltage: AC85-265V, 50/60 Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

## OPTIONS

- 0-10V or DALI Dimmable
- Available in: 3000/3500/4000/5000K CCT
- Available in custom colours upon request
- Custom lengths & shapes available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-LY-5540-SM-18W	18W/Meter	80	Desired Length x 55mmW x 40mmH
AES-LY-5540-SM-28W	28W/Meter	80	Desired Length x 55mmW x 40mmH
AES-LY-5540-SM-38W	38W/Meter	80	Desired Length x 55mmW x 40mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	3500K	3.5K	4000K	4K
5000K	5K	0-10V Dimmable	0-10V	DALI Dimmable	DALI
White Body	WH	Black Body	BL	Custom Colour	CUS



**AES**  
Australian EcoTech Solutions

**A:** 1/123 Merrindale Drive, Croydon South VIC 3136  
**P:** (03) 8761 6734  
**E:** sales@ausecotech.com.au  
**W:** www.ausecotech.com.au



**RoHS**