


# Lyle SM 55x70



**CEILING  
MOUNT**

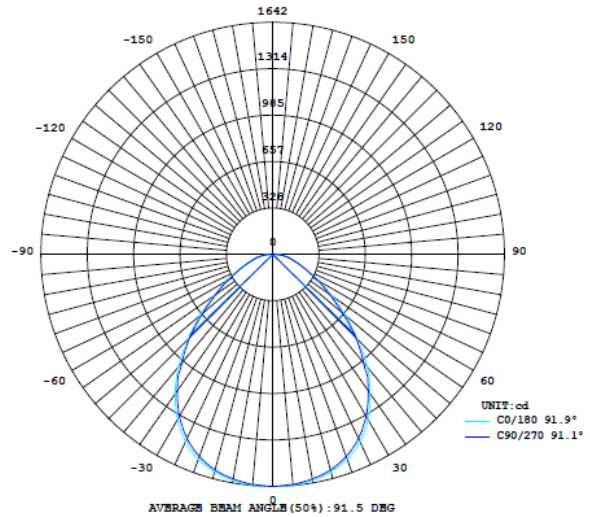

## FEATURES

- Aluminium Housing
- Polycarbonate Diffuser
- LED Type: Samsung
- Driver: Phillips
- Voltage: AC85-265V, 50/60 Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

## OPTIONS

- 0-10V or DALI Dimmable
- Available in: 3000/3500/4000/5000K CCT
- Available in custom colours upon request
- Custom lengths & shapes available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-LY-5570-SM-18W	18W/Meter	80	Desired Length x 55mmW x 70mmH
AES-LY-5570-SM-28W	28W/Meter	80	Desired Length x 55mmW x 70mmH
AES-LY-5570-SM-38W	38W/Meter	80	Desired Length x 55mmW x 70mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

<b>3000K</b>	3K	<b>3500K</b>	3.5K	<b>4000K</b>	4K
<b>5000K</b>	5K	<b>0-10V Dimmable</b>	0-10V	<b>DALI Dimmable</b>	DALI
<b>White Body</b>	WH	<b>Black Body</b>	BL	<b>Custom Colour</b>	CUS



**AES**  
Australian EcoTech Solutions

**A:** 1/123 Merrindale Drive, Croydon South VIC 3136  
**P:** (03) 8761 6734  
**E:** sales@ausecotech.com.au  
**W:** www.ausecotech.com.au



**RoHS**