


Lyle Shape Sus 50x80

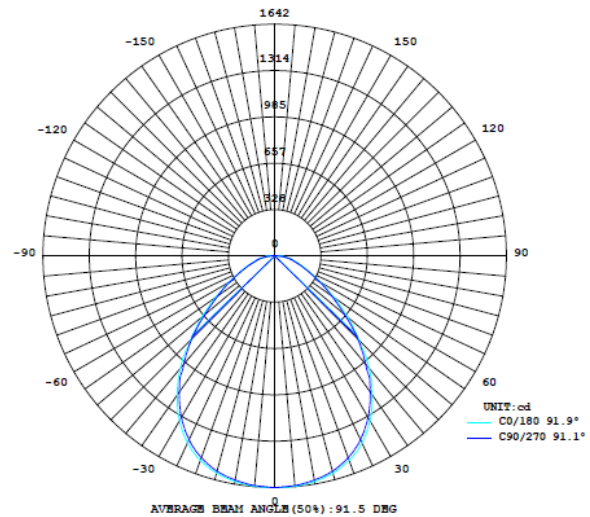

FEATURES

- Aluminium Housing
- Polycarbonate Diffuser
- LED Type: Samsung
- Driver: Phillips
- Voltage: AC85-265V, 50/60 Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

OPTIONS

- 0-10V or DALI Dimmable
- Available in: 3000/3500/4000/5000K CCT
- Available in custom colours upon request
- Custom lengths, angles & shapes available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-LY-SH-5080-SUS-18W	18W/Meter	80	Desired Length x 50mmW x 80mmH
AES-LY-SH-5080-SUS-28W	28W/Meter	80	Desired Length x 50mmW x 80mmH
AES-LY-SH-5080-SUS-38W	38W/Meter	80	Desired Length x 50mmW x 80mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	3500K	3.5K	4000K	4K
5000K	5K	0-10V Dimmable	0-10V	DALI Dimmable	DALI
White Body	WH	Black Body	BL	Custom Colour	CUS
Square Shape	SQ	Triangle Shape	TRI	Hexagon Shape	HEX
Other Shape	OS				



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
P: (03) 8761 6734
E: sales@ausecotech.com.au
W: www.ausecotech.com.au



RoHS