


Prime TriProof Series 1200

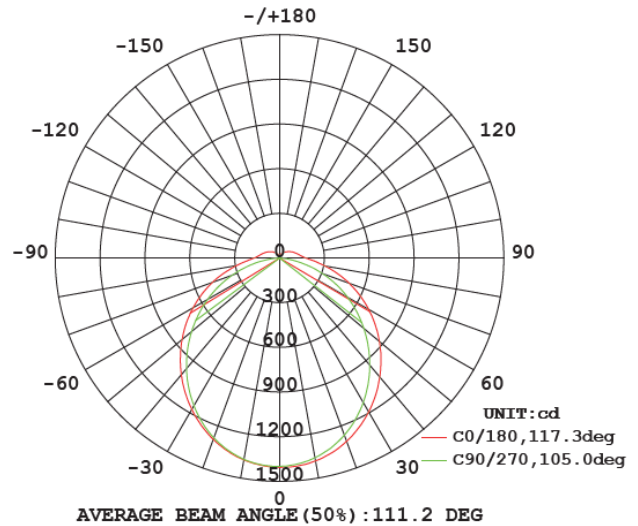

FEATURES

- Aluminum Housing
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC85-265V, 50/60Hz Hz
- **Single fitting - adjustable wattage**
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -20°C to 45°C

OPTIONS

- DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Integral Sensor Available
- Available in 140 or 160 Lumens/W
- Emergency Componentry Available
- Able to be Surface Mounted or Suspended

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-40DN1-22/40W	22-40W	140	1200mmL x 84mmW x 73mmH
AES-TP-40PN1-22/40W	22-40W	160	1200mmL x 84mmW x 73mmH
AES-TP-60SN1-32/64W	32-60W	140	1200mmL x 84mmW x 73mmH
AES-TP-60PN1-32/64W	32-60W	160	1200mmL x 84mmW x 73mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
6000K	6K	DALI Dimmable	DALI	Sensor Control	SEN
Emergency Comp	EMG	Suspended	SUS	Surface Mounted	SM



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
P: (03) 8761 6734
E: sales@ausecotech.com.au
W: www.ausecotech.com.au



RoHS