


# Single Series 1800

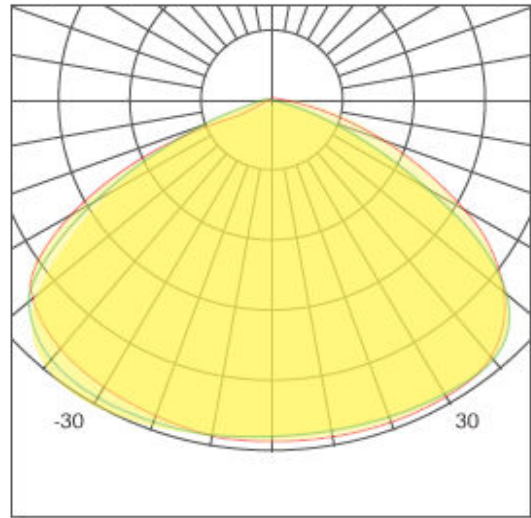

## FEATURES

- Steel Case
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC200-240, 50Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -15°C to 50°C

## OPTIONS

- 0-10V or DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Integral Sensor Available
- Available in 125 or 140 Lumens/W
- Emergency Componentry Available
- Able to be Surface Mounted or Suspended

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-SFF01-30W	30W	125	1800mmL x 80mmW x 75mmH
AES-TP-SFF01-30W	30W	140	1800mmL x 80mmW x 75mmH
AES-TP-SFF01-50W	50W	125	1800mmL x 80mmW x 75mmH
AES-TP-SFF01-50W	50W	140	1800mmL x 80mmW x 75mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

<b>3000K</b>	3K	<b>4000K</b>	4K	<b>5000K</b>	5K
<b>6000K</b>	6K	<b>0-10V Dimmable</b>	0-10V	<b>DALI Dimmable</b>	DALI
<b>Emergency Comp</b>	EMG	<b>Sensor Control</b>	SEN	<b>Suspended</b>	SUS
<b>Surface Mounted</b>	SM				



**AES**  
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136  
P: (03) 8761 6734  
E: sales@ausecotech.com.au  
W: www.ausecotech.com.au



**RoHS**