


# Slim Series 1500

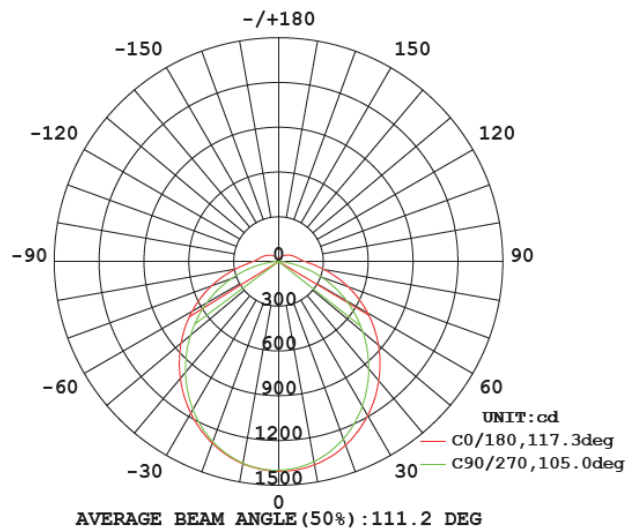

## FEATURES

- Aluminum Housing
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC220-240V, 50Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -15°C to 50°C

## OPTIONS

- 0-10V or DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Integral Sensor Available
- Available in 125, 140 or 160 Lumens/W
- Emergency Componentry Available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-STF01-28W	28W	125	1500mmL x 55mmW x 58mmH
AES-TP-STF01-28W	28W	140	1500mmL x 55mmW x 58mmH
AES-TP-STF01-28W	28W	160	1500mmL x 55mmW x 58mmH
AES-TP-STF01-45W	45W	125	1500mmL x 55mmW x 58mmH
AES-TP-STF01-45W	45W	140	1500mmL x 55mmW x 58mmH
AES-TP-STF01-45W	45W	160	1500mmL x 55mmW x 58mmH
AES-TP-STF01-56W	56W	125	1500mmL x 55mmW x 58mmH
AES-TP-STF01-56W	56W	140	1500mmL x 55mmW x 58mmH
AES-TP-STF01-56W	56W	160	1500mmL x 55mmW x 58mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

<b>3000K</b>	3K	<b>4000K</b>	4K	<b>5000K</b>	5K
<b>6000K</b>	6K	<b>0-10V Dimmable</b>	0-10V	<b>DALI Dimmable</b>	DALI
<b>Emergency Comp</b>	EMG	<b>Sensor Control</b>	SEN		



**AES**  
 Australian EcoTech Solutions

**A:** 1/123 Merrindale Drive, Croydon South VIC 3136  
**P:** (03) 8761 6734  
**E:** sales@ausecotech.com.au  
**W:** www.ausecotech.com.au



**RoHS**