


Slim Series 1800

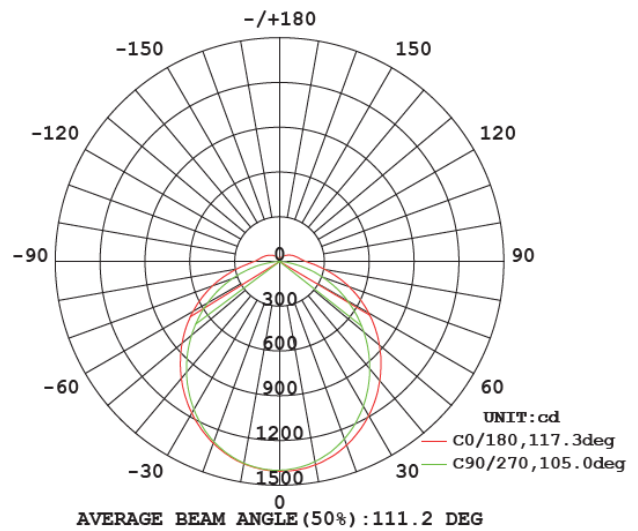

FEATURES

- Aluminum Housing
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC220-240V, 50Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -15°C to 50°C

OPTIONS

- 0-10V or DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Integral Sensor Available
- Available in 125, 140 or 160 Lumens/W
- Emergency Componentry Available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-STF01-32W	32W	125	1800mmL x 55mmW x 58mmH
AES-TP-STF01-32W	32W	140	1800mmL x 55mmW x 58mmH
AES-TP-STF01-32W	32W	160	1800mmL x 55mmW x 58mmH
AES-TP-STF01-62W	62W	125	1800mmL x 55mmW x 58mmH
AES-TP-STF01-62W	62W	140	1800mmL x 55mmW x 58mmH
AES-TP-STF01-62W	62W	160	1800mmL x 55mmW x 58mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
6000K	6K	0-10V Dimmable	0-10V	DALI Dimmable	DALI
Emergency Comp	EMG	Sensor Control	SEN		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS