


Wega Series 1500

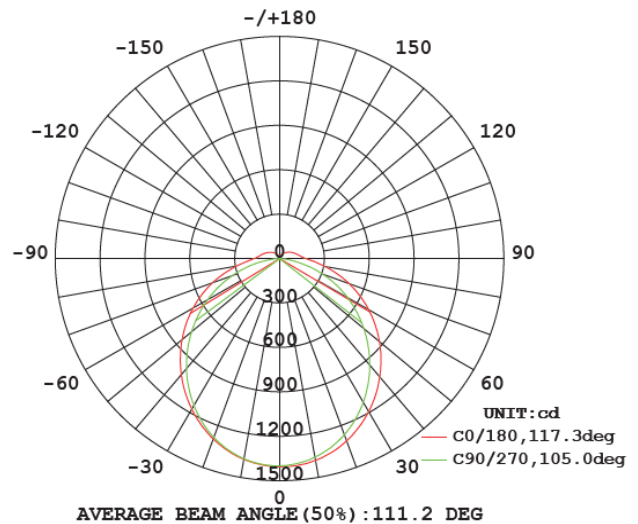

FEATURES

- Aluminum Housing
- Polycarbonate Diffuser
- LED Type: SMD 2835
- Voltage: AC220-240V, 50Hz
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -15°C to 50°C

OPTIONS

- DALI Dimmable
- Available in optional CCT: 3000/4000/5000/6000K
- Available in 125 or 140 Lumens/W
- Integral Sensor Available

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-TP-WGF01-29W	29W	125	1500mmL x 55mmW x 59mmH
AES-TP-WGF01-29W	29W	140	1500mmL x 55mmW x 59mmH
AES-TP-WGF01-55W	55W	125	1500mmL x 55mmW x 59mmH
AES-TP-WGF01-55W	55W	140	1500mmL x 55mmW x 59mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5000K	5K
6000K	6K	Sensor Control	SEN	DALI Dimmable	DALI



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136

P: (03) 8761 6734

E: sales@ausecotech.com.au

W: www.ausecotech.com.au



RoHS

