


Bourke Series

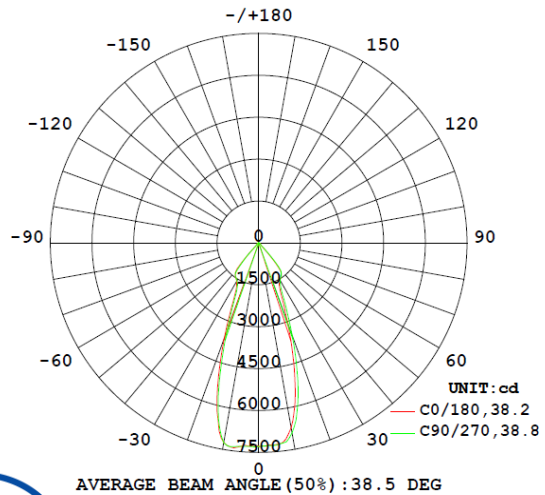

FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free
- Beam Angle 45°
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Available with a white or silver reflector
- Colour Render Index (CRI): >RA83/92
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PSDL10C12-10W	10W	100	100mmØ x 75mmH	90mmØ
AES-PSDL20C12-20W	20W	100	140mmØ x 90mmH	130mmØ
AES-PSDL30C12-30W	30W	100	185mmØ x 112mmH	170mmØ
AES-PSDL40C12-40W	40W	100	230mmØ x 128mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 36°	36°	Beam Angle 60°	60°	CRI >RA83	CRI83
CRI >RA92	CRI92	White Reflector	WR	Silver Reflector	SR



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS