


Bulleye Large Series

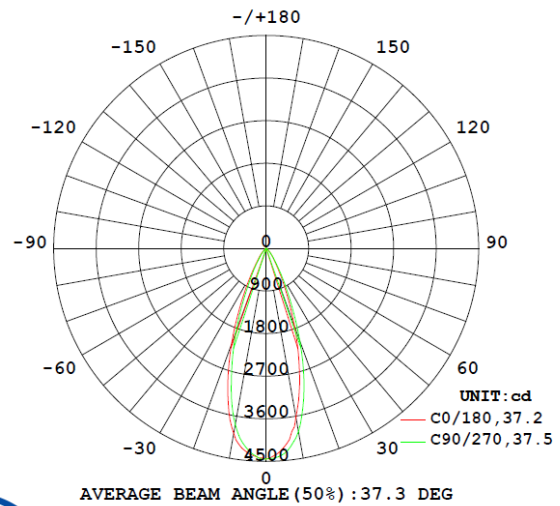

FEATURES

- Aluminium Housing
- PMMA Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free/Boke
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Beam angles of 15°, 24° or 38° available
- Colour Render Index (CRI): >RA83/90/97
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-GDL30W	30W	100	160mmØ x 135mmH	145mmØ
AES-PS-GDL30W	30W	110	160mmØ x 135mmH	145mmØ
AES-PS-GDL40W	40W	100	190mmØ x 160mmH	175mmØ
AES-PS-GDL40W	40W	110	190mmØ x 160mmH	175mmØ
AES-PS-GDL50W	50W	100	190mmØ x 160mmH	175mmØ
AES-PS-GDL50W	50W	110	190mmØ x 160mmH	175mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 15°	15°	Beam Angle 24°	24°	Beam Angle 38°	38°
CRI >RA83	CRI83	CRI >RA90	CRI90	CRI >RA97	CRI97



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136

P: (03) 8761 6734

E: sales@ausecotech.com.au

W: www.ausecotech.com.au



RoHS