


Bulleye Series

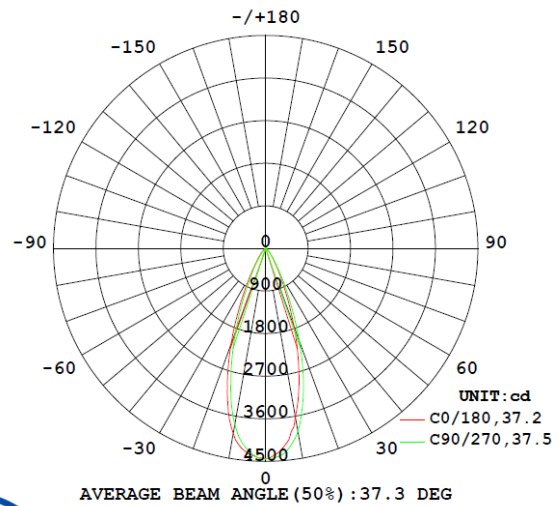

FEATURES

- Aluminium Housing
- PMMA Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Beam angles of 15°, 24° or 38° available
- Colour Render Index (CRI): >RA83/90/97
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-GDL12W	12W	100	90mmØ x 60mmH	75mmØ
AES-PS-GDL12W	12W	110	90mmØ x 60mmH	75mmØ
AES-PS-GDL15W	15W	100	102mmØ x 80mmH	90mmØ
AES-PS-GDL15W	15W	110	102mmØ x 80mmH	90mmØ
AES-PS-GDL20W	20W	100	125mmØ x 108mmH	110mmØ
AES-PS-GDL20W	20W	110	125mmØ x 108mmH	110mmØ
AES-PS-GDL25W	25W	100	140mmØ x 115mmH	125mmØ
AES-PS-GDL25W	25W	110	140mmØ x 115mmH	125mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 15°	15°	Beam Angle 24°	24°	Beam Angle 38°	38°
CRI >RA83	CRI83	CRI >RA90	CRI90	CRI >RA97	CRI97



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS