


Clyde Large Series

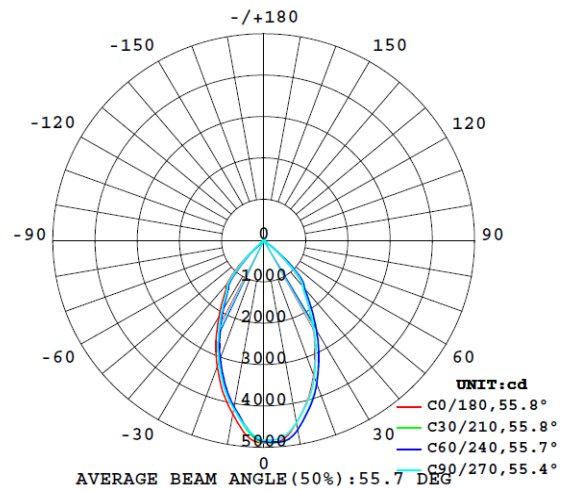

FEATURES

- Aluminium Housing
- Glass Lens
- LED Type: Citizen COB
- Driver: Boke/Meanwell
- Colour Render Index (CRI): >RA80
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.95

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Beam angles of 24°, 40° or 60° available
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Available in 100 or 110 Lumens/W
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL50W-7	50W	100	160mmØ x 153mmH	140mmØ
AES-PS-DL50W-7	50W	110	160mmØ x 153mmH	140mmØ
AES-PS-DL60W-7	60W	100	185mmØ x 156mmH	160mmØ
AES-PS-DL60W-7	60W	110	185mmØ x 156mmH	160mmØ
AES-PS-DL70W-7	70W	100	185mmØ x 156mmH	200mmØ
AES-PS-DL70W-7	70W	110	185mmØ x 156mmH	200mmØ
AES-PS-DL80W-7	80W	100	285mmØ x 220mmH	260mmØ
AES-PS-DL80W-7	80W	110	285mmØ x 220mmH	260mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 24°	24°	Beam Angle 40°	40°	Beam Angle 60°	60°



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136

P: (03) 8761 6734

E: sales@ausecotech.com.au

W: www.ausecotech.com.au



RoHS