


Clyde Series

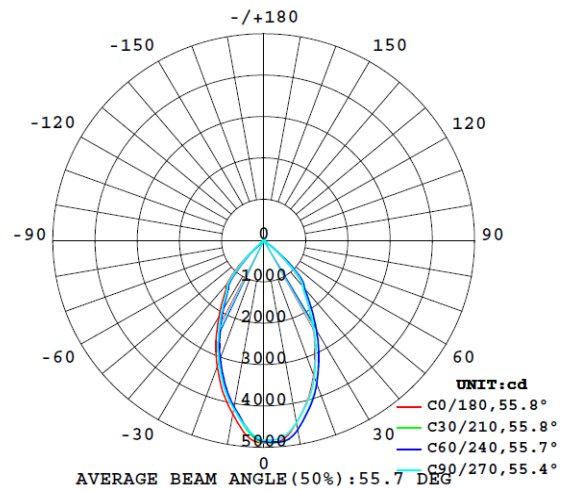

FEATURES

- Aluminium Housing
- Glass Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free
- Colour Render Index (CRI): >RA80
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.95

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Beam angles of 24°, 40° or 60° available
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Available in 100 or 110 Lumens/W
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL10W-7	10W	100	95mmØ x 102mmH	75mmØ
AES-PS-DL10W-7	10W	110	95mmØ x 102mmH	75mmØ
AES-PS-DL12W-7	12W	100	115mmØ x 116mmH	95mmØ
AES-PS-DL12W-7	12W	110	115mmØ x 116mmH	95mmØ
AES-PS-DL20W-7	20W	100	142mmØ x 101mmH	125mmØ
AES-PS-DL20W-7	20W	110	142mmØ x 101mmH	125mmØ
AES-PS-DL30W-7	30W	100	160mmØ x 133mmH	140mmØ
AES-PS-DL30W-7	30W	110	160mmØ x 133mmH	140mmØ
AES-PS-DL40W-7	40W	100	160mmØ x 133mmH	140mmØ
AES-PS-DL40W-7	40W	110	160mmØ x 133mmH	140mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 24°	24°	Beam Angle 40°	40°	Beam Angle 60°	60°



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS