


Emerald Large Series

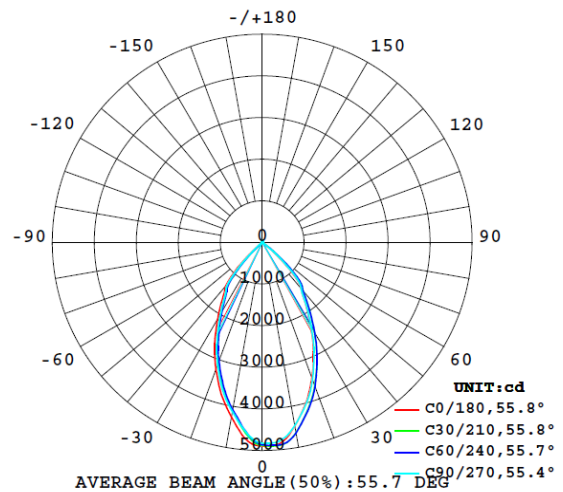

FEATURES

- Aluminium Housing
- Glass Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free/ Boke
- Beam Angle: 60°
- Colour Render Index (CRI): >RA83
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.95

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Available in 100 or 110 Lumens/W
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL20W-6"	20W	100	190mmØ x 86mmH	170mmØ
AES-PS-DL20W-6"	20W	110	190mmØ x 86mmH	170mmØ
AES-PS-DL30W-6"	30W	100	190mmØ x 86mmH	170mmØ
AES-PS-DL30W-6"	30W	110	190mmØ x 86mmH	170mmØ
AES-PS-DL30W-8"	30W	100	230mmØ x 99mmH	210mmØ
AES-PS-DL30W-8"	30W	110	230mmØ x 99mmH	210mmØ
AES-PS-DL40W-8"	40W	100	230mmØ x 99mmH	210mmØ
AES-PS-DL40W-8"	40W	110	230mmØ x 99mmH	210mmØ
AES-PS-DL50W-8"	50W	100	230mmØ x 99mmH	210mmØ
AES-PS-DL50W-8"	50W	110	230mmØ x 99mmH	210mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT



AES
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
P: (03) 8761 6734
E: sales@ausecotech.com.au
W: www.ausecotech.com.au



RoHS