


Endeavour Series

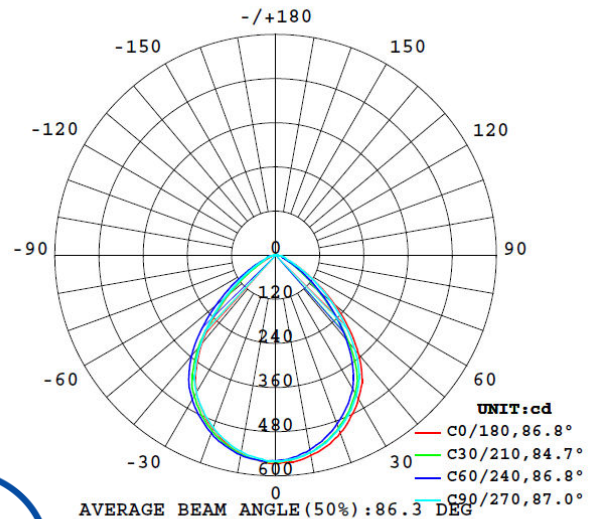

FEATURES

- Aluminium Housing
- Glass Lens
- LED Type: Philips SMD 2835
- Driver: Archi Flicker-Free
- Beam Angle 90°
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/4000/5000/5700K
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL-9W-3"-A21-9W	9W	100	106mmØ x 34mmH	90-95mmØ
AES-PS-DL-9W-3"-A21-9W	9W	110	106mmØ x 34mmH	90-95mmØ
AES-PS-DL-9W-3"-A21-9W	9W	120	106mmØ x 34mmH	90-95mmØ
AES-PS-DL-12W-4"-A21-12W	12W	100	140mmØ x 36mmH	125-135mmØ
AES-PS-DL-12W-4"-A21-12W	12W	110	140mmØ x 36mmH	125-135mmØ
AES-PS-DL-12W-4"-A21-12W	12W	120	140mmØ x 36mmH	125-135mmØ
AES-PS-DL-20W-6"-A21-20W	20W	100	180mmØ x 38mmH	160mmØ
AES-PS-DL-20W-6"-A21-20W	20W	110	180mmØ x 38mmH	160mmØ
AES-PS-DL-20W-6"-A21-20W	20W	120	180mmØ x 38mmH	160mmØ
AES-PS-DL-30W-8"-A21-30W	30W	100	230mmØ x 38mmH	200mmØ
AES-PS-DL-30W-8"-A21-30W	30W	110	230mmØ x 38mmH	200mmØ
AES-PS-DL-30W-8"-A21-30W	30W	120	230mmØ x 38mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	4000K	4K
5000K	5K	5700K	5.7K	0-10V Dimmable	0-10V
Triac Dimmable	TRI	DALI Dimmable	DALI	White Trim	WT
Black Trim	BT	Custom Colour Trim	CT		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS