


# Fitzroy Series

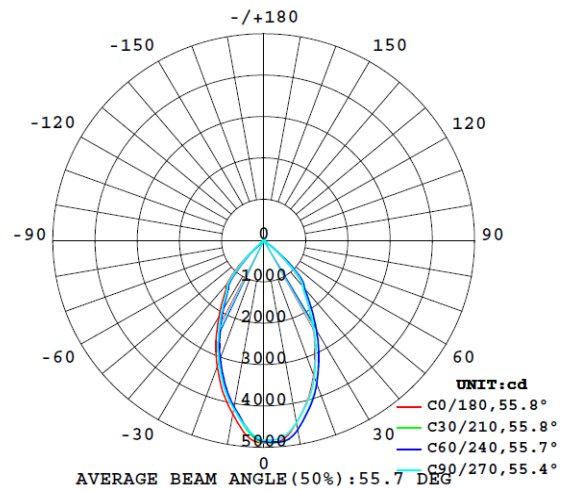

## FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

## OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Colour Render Index (CRI): >RA83/92
- Beam angles of 24°, 38°, 50°, or 60° available
- Available in black, white or custom colour trims
- Available in a range of shiny or matte reflectors

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL12C18-12W	12W	90	86mmØ x 55mmH	75mmØ
AES-PS-DL15C18-15W	15W	90	101mmØ x 60mmH	90mmØ
AES-PS-DL20C18-20W	20W	90	140mmØ x 73mmH	125mmØ
AES-PS-DL30C18-30W	30W	90	180mmØ x 94mmH	165mmØ
AES-PS-DL40C18-40W	40W	90	214mmØ x 110mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Matte Silver Reflector	MSR	Matte Black Reflector	MBR	Shiny Silver Reflector	SSR
Shiny Black Reflector	SBR	Beam Angle 24°	24°	Beam Angle 38°	38°
Beam Angle 50°	50°	Beam Angle 60°	60°	CRI >RA83	CRI83
CRI >RA92	CRI92				



**AES**  
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136  
 P: (03) 8761 6734  
 E: sales@ausecotech.com.au  
 W: www.ausecotech.com.au



**RoHS**