


G2 Extreme Series 1500

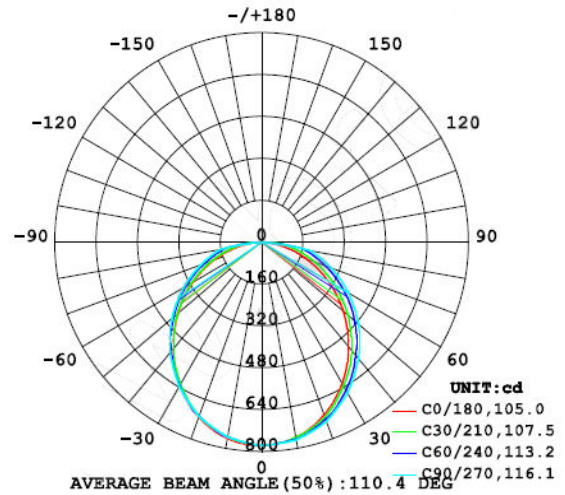

FEATURES

- Polycarbonate Housing
- Polycarbonate Diffuser
- LED Type: Epistar 2835
- LED Driver: CE Driver
- Voltage: AC100-240V, 50/60Hz
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -40°C to 50°C

OPTIONS

- 0-10V
- Available in optional CCT: 4000/5000/6500K
- Integral Sensor Available
- Surface Mount or Suspended options
- Emergency Componentry Available
- Series Linkable

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-BR-TPL60W-01-G2-P1-150	60W	115	1500mmL x 93mmW x 74mmH
AES-BR-TPL80W-01-G2-P1-150	80W	115	1500mmL x 93mmW x 74mmH

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

4000K	4K	5000K	5K	6500K	6.5K
0-10V Dimmable	0-10V	Linkable	LNK	Emergency Comp	EMG
Sensor Control	SEN	Surface Mount	SM	Suspended	SUS



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS