


# G2 Extreme Series 900

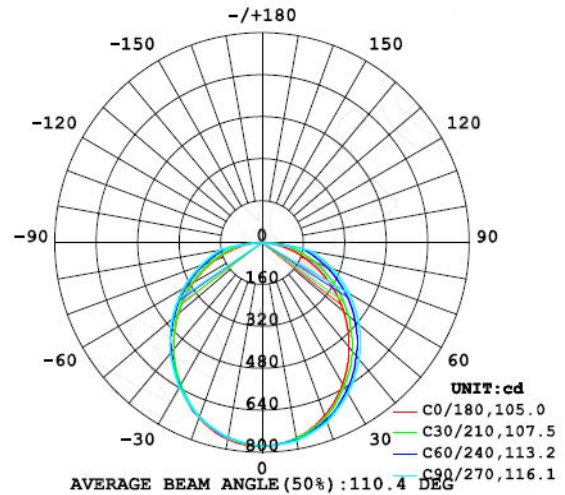

## FEATURES

- Polycarbonate Housing
- Polycarbonate Diffuser
- LED Type: Epistar 2835
- LED Driver: CE Driver
- Voltage: AC100-240V, 50/60Hz
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Beam Angle: 120°
- Working Temperature Range: -40°C to 50°C

## OPTIONS

- 0-10V
- Available in optional CCT: 4000/5000/6500K
- Integral Sensor Available
- Surface Mount or Suspended options
- Emergency Componentry Available
- Series Linkable

| MODEL NO                  | WATTAGE | EFFICACY (Lumens/Watt) | SIZE                   |
|---------------------------|---------|------------------------|------------------------|
| AES-BR-TPL30W-01-G2-P1-90 | 30W     | 115                    | 900mmL x 93mmW x 74mmH |
| AES-BR-TPL40W-01-G2-P1-90 | 40W     | 115                    | 900mmL x 93mmW x 74mmH |

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

|                |       |               |     |                |      |
|----------------|-------|---------------|-----|----------------|------|
| 4000K          | 4K    | 5000K         | 5K  | 6500K          | 6.5K |
| 0-10V Dimmable | 0-10V | Linkable      | LNK | Emergency Comp | EMG  |
| Sensor Control | SEN   | Surface Mount | SM  | Suspended      | SUS  |



**AES**  
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136  
P: (03) 8761 6734  
E: sales@ausecotech.com.au  
W: www.ausecotech.com.au



**RoHS**