


Kilsyth Series

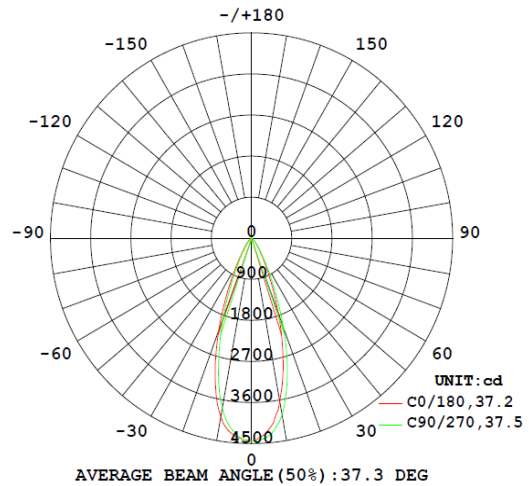

FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: Citizen COB
- Driver: Archi Flicker-Free
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000/5700K
- Colour Render Index (CRI): >RA83/92
- Beam angles of 15°, 24° or 38° available
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL9C10-9W	9W	100	85mmØ x 80mmH	75mmØ
AES-PS-DL12C10-12W	12W	100	85mmØ x 80mmH	75mmØ
AES-PS-DL15C10-15W	15W	100	104mmØ x 108mmH	95mmØ
AES-PS-DL20C10-20W	20W	100	132mmØ x 127mmH	125mmØ
AES-PS-DL30C10-30W	30W	100	132mmØ x 127mmH	125mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	5700K	5.7K
0-10V Dimmable	0-10V	Triac Dimmable	TRI	DALI Dimmable	DALI
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT
Beam Angle 15°	15°	Beam Angle 24°	24°	Beam Angle 38°	38°
CRI >RA83	CRI83	CRI >RA92	CRI92		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
P: (03) 8761 6734
E: sales@ausecotech.com.au
W: www.ausecotech.com.au



RoHS