



# Laura Series

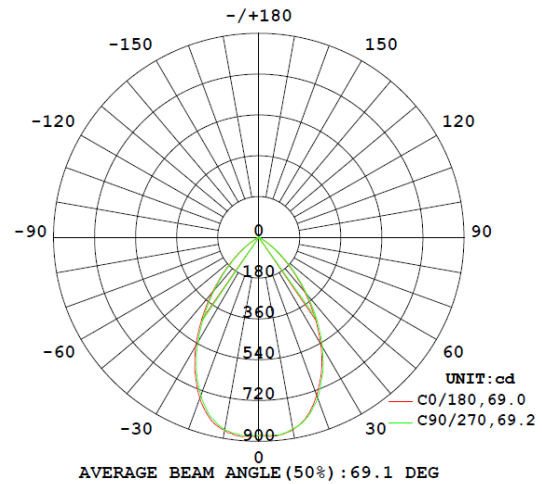

**CEILING  
RECESSED**

## FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: SMD 2835
- Driver: Archi Flicker-Free
- Beam Angle: 70°
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V

## OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/4000/5000/5700K
- Reflector available in white/black/silver
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL10A94-10W	10W	90	135mmØ x 66mmH	115-120mmØ
AES-PS-DL15A94-15W	15W	90	135mmØ x 66mmH	115-120mmØ
AES-PS-DL20A96-20W	20W	90	190mmØ x 90mmH	165-175mmØ
AES-PS-DL30A96-30W	30W	90	190mmØ x 90mmH	165-175mmØ
AES-PS-DL30WA98-30W	30W	90	224mmØ x 98mmH	195-210mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

<b>2700K</b>	2.7K	<b>3000K</b>	3K	<b>4000K</b>	4K
<b>5000K</b>	5K	<b>5700K</b>	5.7K	<b>0-10V Dimmable</b>	0-10V
<b>Triac Dimmable</b>	TRI	<b>DALI Dimmable</b>	DALI	<b>White Reflector</b>	WR
<b>Black Reflector</b>	BR	<b>Silver Reflector</b>	SR	<b>White Trim</b>	WT
<b>Black Trim</b>	BT	<b>Custom Colour Trim</b>	CT		



**AES**  
Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136  
 P: (03) 8761 6734  
 E: sales@ausecotech.com.au  
 W: www.ausecotech.com.au



**RoHS**