


Montrose Series

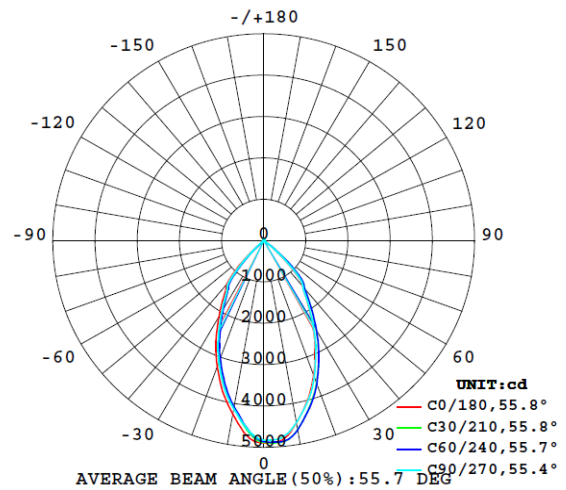

FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: Citizen/Bridgelux COB
- Driver: Archi Flicker-Free
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/4000/5000K
- Colour Render Index (CRI): >RA83/92
- Beam angles of 36° or 60° available
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL8C12-IP65-8W	8W	80	87mmØ x 58mmH	75mmØ
AES-PS-DL12C12-IP65-12W	12W	80	110mmØ x 67mmH	100mmØ
AES-PS-DL15C12-IP65-15W	15W	80	130mmØ x 75mmH	115mmØ
AES-PS-DL20C12-IP65-20W	20W	80	160mmØ x 84mmH	140mmØ
AES-PS-DL30C12-IP65-30W	30W	80	190mmØ x 98mmH	170mmØ
AES-PS-DL40C12-IP65-40W	40W	80	225mmØ x 115mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	4000K	4K
5000K	5K	0-10V Dimmable	0-10V	Triac Dimmable	TRI
DALI Dimmable	DALI	White Trim	WT	Black Trim	BT
Custom Colour Trim	CT	Beam Angle 36°	36°	Beam Angle 60°	60°
CRI >RA83	CRI83	CRI >RA92	CRI92		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS