



Power Series

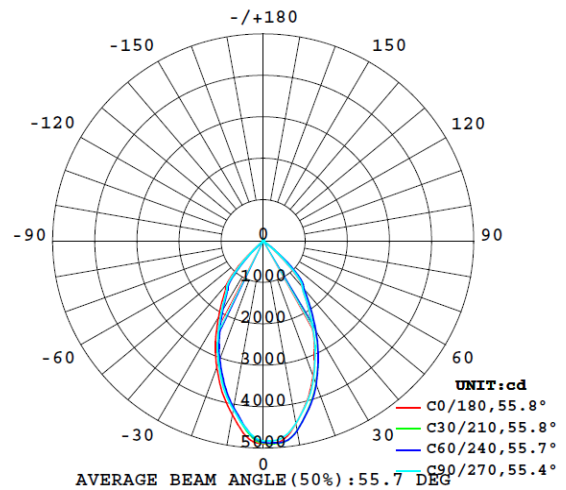

FEATURES

- Die-Cast Aluminium Housing
- PMMA Lens
- LED Type: Citizen/Luminous COB
- Driver: Archi Flicker-Free
- Colour Render Index (CRI): >RA80
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.95

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/3500/4000/5000K
- Colour Render Index (CRI): >RA83/92
- Beam angles of 13°, 24°, 38° or 60° available
- Available in black, white or custom colour trims
- Available in a wide range of shiny or matte reflectors

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL10C35-10W	10W	80	90mmØ x 60mmH	75mmØ
AES-PS-DL12C35-12W	12W	80	95mmØ x 60mmH	80mmØ
AES-PS-DL15C35-15W	15W	80	105mmØ x 72mmH	95mmØ
AES-PS-DL20C35-20W	20W	80	130mmØ x 72mmH	120mmØ
AES-PS-DL30C35-30W	30W	80	160mmØ x 82mmH	145mmØ
AES-PS-DL40C35-40W	40W	80	180mmØ x 90mmH	160mmØ
AES-PS-DL50C35-50W	50W	80	230mmØ x 100mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	3500K	3.5K
4000K	4K	5000K	5K	0-10V Dimmable	0-10V
Triac Dimmable	TRI	DALI Dimmable	DALI	White Trim	WT
Black Trim	BT	Custom Colour Trim	CT	Beam Angle 13°	13°
Beam Angle 24°	24°	Beam Angle 38°	38°	Beam Angle 60°	60°
CRI >RA83	CRI83	CRI >RA92	CRI92	Matte Black Reflector	MBR
Matte White Reflector	MWR	Rose Gold Reflector	RGR	Shiny Black Reflector	SBR
Shiny Silver Reflector	SSR	Shiny White Reflector	SWR	Shiny Yellow Reflector	SYR



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS