


Temple Series

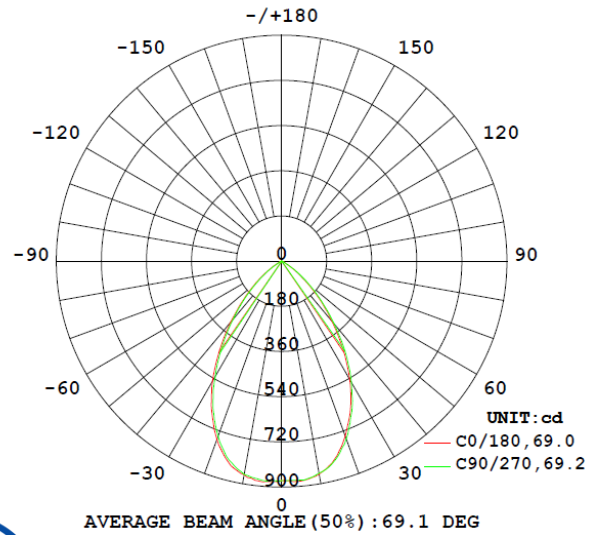

FEATURES

- Aluminium Housing
- PMMA Lens
- LED Type: Philips SMD 2835
- Driver: Archi Flicker-Free
- Beam Angle 70°
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.90
- Colour Render Index (CRI): >RA80

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/4000/5000/5700K
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL8A153-8W	8W	80	110mmØ x 68mmH	90mmØ
AES-PS-DL8A153-8W	8W	90	110mmØ x 68mmH	90mmØ
AES-PS-DL10A153-10W	10W	80	110mmØ x 68mmH	90mmØ
AES-PS-DL10A153-10W	10W	90	110mmØ x 68mmH	90mmØ
AES-PS-DL15A154-15W	15W	80	140mmØ x 68mmH	120mmØ
AES-PS-DL15A154-15W	15W	90	140mmØ x 68mmH	120mmØ
AES-PS-DL30A156-30W	30W	80	180mmØ x 90mmH	150mmØ
AES-PS-DL30A156-30W	30W	90	180mmØ x 90mmH	150mmØ
AES-PS-DL40WA158-40W	40W	80	230mmØ x 120mmH	200mmØ
AES-PS-DL40WA158-40W	40W	90	230mmØ x 120mmH	200mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	4000K	4K
5000K	5K	5700K	5.7K	0-10V Dimmable	0-10V
Triac Dimmable	TRI	DALI Dimmable	DALI	White Trim	WT
Black Trim	BT	Custom Colour Trim	CT		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS