


Yarra Series

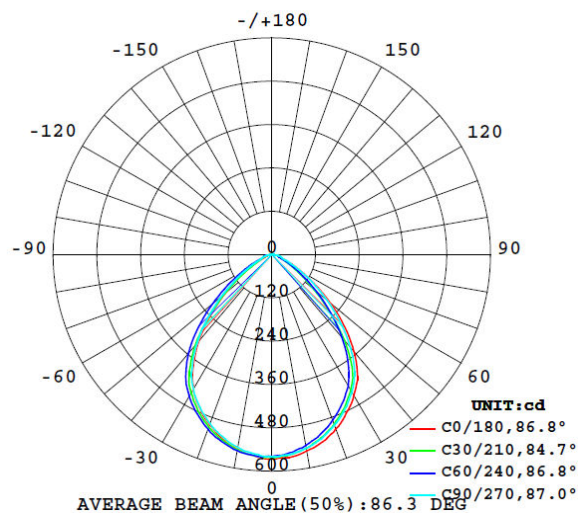

FEATURES

- Aluminium Housing
- Frosted PMMA Lens
- LED Type: SMD 2835
- Driver: Archi Flicker-Free
- Beam Angle: 90°
- Colour Render Index (CRI): >RA80
- Working Temperature Range: -15°C to 40°C
- Voltage: AC220-240V
- Power Factor: >0.95

OPTIONS

- 0-10V, Triac or DALI Dimmable
- Available in optional CCT: 2700/3000/4000/5000/5700K
- Available in 100 or 110 Lumens/W
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE	CUTOUT
AES-PS-DL8A63-8W	8W	100	115mmØ x 48mmH	100-105mmØ
AES-PS-DL8A63-8W	8W	110	115mmØ x 48mmH	100-105mmØ
AES-PS-DL12A64-12W	12W	100	145mmØ x 54mmH	130-135mmØ
AES-PS-DL12A64-12W	12W	110	145mmØ x 54mmH	130-135mmØ
AES-PS-DL15A66-15W	15W	100	160mmØ x 60mmH	145-150mmØ
AES-PS-DL15A66-15W	15W	110	160mmØ x 60mmH	145-150mmØ
AES-PS-DL20A66-20W	20W	100	190mmØ x 60mmH	170-180mmØ
AES-PS-DL20A66-20W	20W	110	190mmØ x 60mmH	170-180mmØ
AES-PS-DL30A68-30W	30W	100	230mmØ x 75mmH	205-215mmØ
AES-PS-DL30A68-30W	30W	110	230mmØ x 75mmH	205-215mmØ

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

2700K	2.7K	3000K	3K	4000K	4K
5000K	5K	5700K	5.7K	0-10V Dimmable	0-10V
Triac Dimmable	TRI	DALI Dimmable	DALI	White Trim	WT
Black Trim	BT	Custom Colour Trim	CT		



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS