
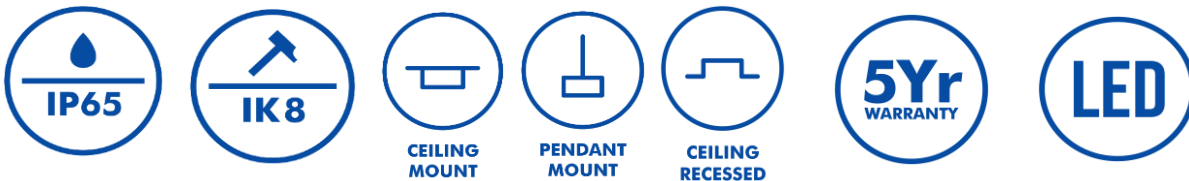


Newport G1 140lm/W

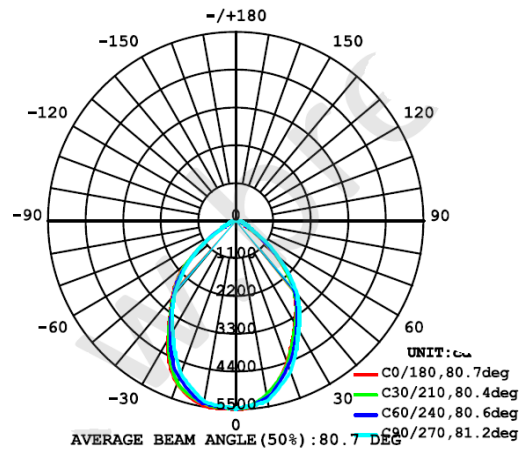

FEATURES

- Die Cast Aluminium Housing
- Injection Molded Polymer Lenses
- LED Type: Lumileds 3030
- Driver: Meanwell
- Beam Angle 80°
- Working Temperature Range: -15°C to 40°C
- Voltage: AC200-240V
- Power Factor: >0.95
- Colour Render Index (CRI): >RA80
- Full 5-year warranty

OPTIONS

- 0-10V or DALI Dimmable
- Available in optional CCT: 3000/4000/5700K
- Available in black, white or custom colour trims

MODEL NO	WATTAGE	EFFICACY (Lumens/Watt)	SIZE
AES-RK-GS60W-01-G1-R	60W	140	412mm W x 412mm L x 102mm H
AES-RK-GS80W-01-G1-R	80W	140	412mm W x 412mm L x 102mm H
AES-RK-GS100W-01-G1-R	100W	140	412mm W x 412mm L x 102mm H
AES-RK-GS120W-01-G1-R	120W	140	412mm W x 412mm L x 102mm H
AES-RK-GS150W-01-G1-R	150W	140	412mm W x 412mm L x 102mm H
AES-RK-GS60W-01-G1-SM	60W	140	348mm W x 348mm L x 76mm H
AES-RK-GS80W-01-G1-SM	80W	140	348mm W x 348mm L x 76mm H
AES-RK-GS100W-01-G1-SM	100W	140	348mm W x 348mm L x 76mm H
AES-RK-GS120W-01-G1-SM	120W	140	348mm W x 348mm L x 76mm H
AES-RK-GS150W-01-G1-SM	150W	140	348mm W x 348mm L x 76mm H
AES-RK-GS60W-01-G1-P	60W	140	348mm W x 348mm L x 120mm H
AES-RK-GS80W-01-G1-P	80W	140	348mm W x 348mm L x 120mm H
AES-RK-GS100W-01-G1-P	100W	140	348mm W x 348mm L x 120mm H
AES-RK-GS120W-01-G1-P	120W	140	348mm W x 348mm L x 120mm H
AES-RK-GS150W-01-G1-P	150W	140	348mm W x 348mm L x 120mm H

Please add additional suffix to end of the above Catalogue Number if these options are to be included.

3000K	3K	4000K	4K	5700K	5.7K
0-10V Dimmable	0-10V	DALI Dimmable	DALI		
White Trim	WT	Black Trim	BT	Custom Colour Trim	CT



AES
 Australian EcoTech Solutions

A: 1/123 Merrindale Drive, Croydon South VIC 3136
 P: (03) 8761 6734
 E: sales@ausecotech.com.au
 W: www.ausecotech.com.au



RoHS